




PEATSA

Lauro Aguirre No. 32-203 . Col. Agricultura . México, D.F. 11360
www.peatsa.com Tels. 5341-8757 . 5342-1586
contacto@peatsa.com

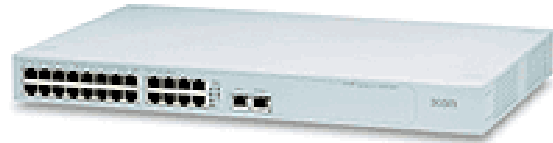

SuperStack® 3 Switch 4226T 24-Port Plus 2 10/100/1000

3C17300

Características y ventajas

Affordable, Fixed-Configuration 10/100 Switching

For copper-wired Ethernet networks that need premium switching performance without the complexity and high price, the 3Com® SuperStack® 3 Switch 4226T is an innovative, yet eminently practical solution.

This 26-port Ethernet switch combines wirespeed Layer 2 switching with easy installation and exceptional reliability, backed by 3Com's limited lifetime warranty. Twenty-four autosensing 10/100 copper ports provide flexible desktop and workgroup attachments, while two autosensing 10/100/1000 copper uplink ports enable Gigabit Ethernet backbone and server connections.

Resiliency features such as Rapid Spanning Tree Protocol, link aggregation (for the 10/100/1000 ports), and a redundant power option help ensure uptime. Built-in Gigabit ports can be used as uplinks or for stacking with a mix of other SuperStack 3 Switch 4228G, SuperStack 3 Switch 4226T, and SuperStack 3 Switch 4250T units

Wirespeed, non-blocking performance

Fixed-configuration design means the switch will operate right out of the box

Switch can configure its own IP settings for management through SNMP, web, or CLI

Forwarding rates up to 6.6 million packets per second

Two built-in 10/100/1000 ports support high-speed connections as uplinks or for stacking

Integrated stack management, for single IP management of up to four units

Redundant power is available using 3Com SuperStack Advanced Redundant Power System

Ships with trial version of 3Com Network Supervisor application, which configures, maps and monitors your system and provides custom alerts and reports

Limited lifetime warranty includes fan and power supply



PEATSA

Lauro Aguirre No. 32-203 . Col.Agricultura . México, D.F. 11360
www.peatsa.com Tels. 5341-8757 . 5342-1586
contacto@peatsa.com

Especificaciones de producto

Ports: 24 autosensing 10BASE-T/100BASE-TX, two 10BASE-T/100BASE-TX/1000BASE-T

Media Interfaces: RJ-45

Ethernet switching features: Full-rate nonblocking on all Ethernet ports, full/half-duplex auto-negotiation and flow control, multicast Layer 2 filtering, 802.1Q VLAN support, 802.1p traffic prioritization, IGMP snooping

Height: 4.36 cm (1.7 in)

Width: 44.0 cm (17.3 in)

Depth: 27.4 cm (10.8 in)

Weight: 3.0 Kg (6.5 lb)

Contenidos del paquete

- Switch
- Rubber feet
- Rack-mount kit
- User's guide
- CD