



PEATSA.

Lauro Aguirre No.32-203 . Col. Agricultura. México, D.F. 11360

Tels: 5342-1586 . 5341-8757

contacto@peatsa.com

www.peatsa.com

Messenger: redes_peatsa@hotmail.com

10/100Mbps Multi-Port Print Server

TE100-P21

TRENDnet TE100-P21 is a Fast Ethernet print server that transforms virtually any stand-alone USB or Parallel networkable printer into a shared network printer. The TE100-P21 is compatible with 10Mbps or 100Mbps Ethernet network and it has two USB 2.0 and one Parallel printer port. Network professionals can easily manage the print server using Web Browser and utilize the TE100-P21 to promote productivity in a workgroup environment with low equipment cost.



Features

- Built-in 1 Parallel (DB 25) and 2 USB 2.0 (Type A) Printer Ports
- Compliant with USB 2.0 High-Speed Printing
- One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet Port
- Supports Email Printing and FTP Printing • Includes LPR Program for Windows 98/ME TCP/IP Printing
- Supports IPP Printing for Windows 2000/XP
- Supports Universal Plug and Play (UPnP) for Windows XP/2003
- Supports Windows Graphical Device Interface (GDI) Printers
- Supports second HTTP port for Remote Web Configuration and IPP Printing
- Supports Mac 10.2 "Rendezvous" Zero-Configuration Function
- Latest MIB-II (RFC 1213) for SNMP Standard Management
- IP Assignment Support for DHCP, BOOTP and RARP
- Includes Windows-Based Administrative Program and Web-Based Configuration
- Built-in Flash Memory for Easy Firmware Upgrade and Configuration File Save & Restore
- Printing Access Control/Display and Email Notification for Printer Error Messages
- 3-Years Warranty

*Mac Systems are only compatible with Post-Script printers

Specifications

Hardware

Standards	IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX
Printer Interface	2 x USB 2.0 Type A Port 1 x Parallel DB25 (Female) Port
LAN Port	10/100Mbps Auto-Negotiation UTP/STP RJ-45 Port
CPU	RDC R2880 100MHz
SDRAM	8MByte
Flash ROM	2MByte
LED	Power, LAN, USB1, USB2, LPT



PEATSA.

Lauro Aguirre No.32-203 . Col. Agricultura. México, D.F. 11360

Tels: 5342-1586 . 5341-8757

contacto@peatsa.com


www.peatsa.com

Messenger: redes_peatsa@hotmail.com

Transport Protocol	TCP/IP, SMB, NetBEUI, AppleTalk
TCP/IP Protocol Supported	BOOTP, SNMP, Telnet, TFTP, FTP, LPD, RARP, DHCP, IPP
OS Support	Windows 95/98(SE)/ME/NT/2000/XP/2003 Netware 5.x NDPS LPR Remote Printing (TCP/IP) HP-UX Unix, Sun OS, Solaris, SCO Unix, AIX Unixware, Linux & Mac OS 9 or higher.
Management	PS Utility, PS Monitor or Web-Browser Configuration
Power	5V DC 2.5A External Power Adapter
Dimensions	206 x 122 x 34mm (8.1 x 4.8 x 1.3 in.)
Weight	289 g (10.2oz.)
Temperature	Operating: 0°~50°C (32°~122°F) Storage: -25°~55°C (-13°~131°F)
Humidity	10%~90% (non-condensing)
Certification	CE, FCC

Networking Solution

10/100Mbps Multi-Port Print Server (TE100-P21)

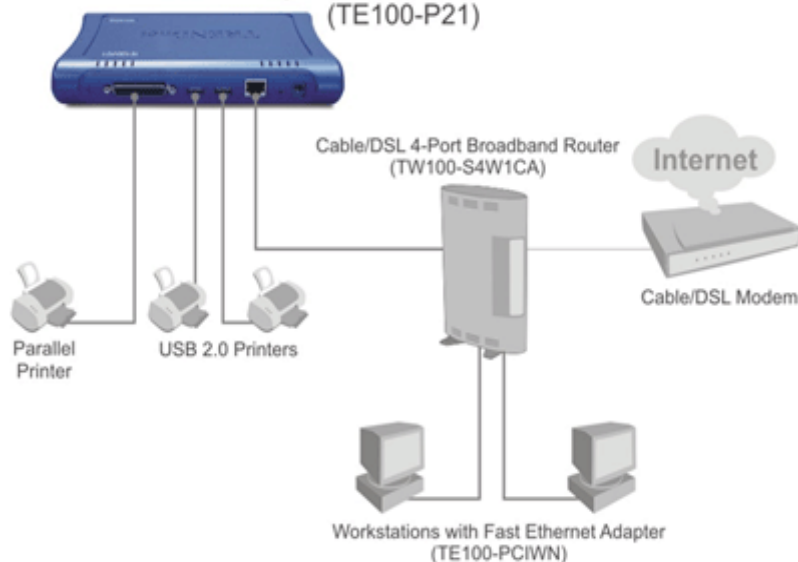

Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice.