




PEATSA

Lauro Aguirre No. 32-203 . Col. Agricultura . México, D.F. 11360
www.peatsa.com Tels. 5341-8757 . 5342-1586
contacto@peatsa.com

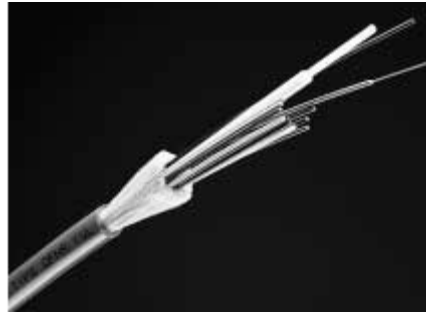

012K81-31130-24

MIC® Riser Cables 2-24 Fiber
A LANscape® Solutions Product

Applications


- Intrabuilding backbone and horizontal installations in riser and general purpose environments

Description


MIC® Cables are multifiber cables utilizing 900 μm tightbuffered fibers surrounded by dielectric strength members and a flame-retardant outer jacket. These cables meet the application requirements of the National Electrical Code® (NEC® Article 770) and are OFNR and FT-4 listed. These cables are ideal for intrabuilding cabling including riser shafts, telecommunications rooms and workstations.

Features / Benefits


- Utilizes 900 μm TBII® Buffered Fibers enabling easy, consistent stripping
- Available in 62.5 μm , 50 μm , single-mode and hybrid versions
- All-dielectric construction requires no grounding and bonding
- Available with interlocking armor
- Availability with approval for TEMPEST applications
- Meets application requirements of the National Electrical Code (NEC Article 770)
- Listed OFNR and FT-4
- Available with MSHA (Mine Safety & Health Administration) approval
- Available with Gigabit Ethernet and 10 Gigabit Ethernet performance

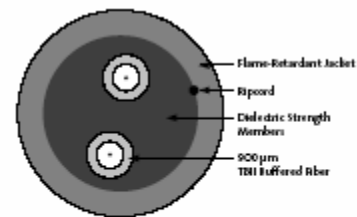

2-Fiber MIC Cable | Drawing CFC-220/1/01

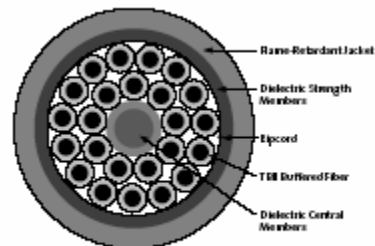

24-Fiber MIC Cable | Drawing CFC-220/1/06

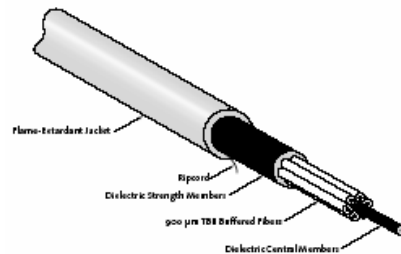

6-Fiber MIC Riser Cable | Drawing CFC-220/1/03



PEATSA

Lauro Aguirre No. 32-203 . Col. Agricultura . México, D.F. 11360
www.peatsa.com Tels. 5341-8757 . 5342-1586
 contacto@peatsa.com

Specifications

Storage Temperature	-40° to +70°C (-40° to +158°F)
Installation Temperature	-10° to +60°C (+14° to +140°F)
Operating Temperature	-20° to +70°C (-4° to +158°F)
Approvals, Listings and Standards	NEC® OFNR, CSA FT-4, ICEA S-83-596
Flame Resistance	UL-1666 (for riser and general building applications)

Fiber Count	Nominal Outer Diameter mm (in)	Nominal Weight kg/km (lb/1000 ft)	Central Member	Maximum Tensile Loads		Minimum Bend Radius	
				Short-Term N (lbf)	Long-Term N (lbf)	Loaded cm (in)	Installed cm (in)
Single Layer							
2	4.7 (0.19)	18 (12)	Y	660 (148)	198 (45)	7.1 (2.8)	4.7 (1.9)
4	4.8 (0.19)	21 (14)	Y	660 (148)	198 (45)	7.2 (2.8)	4.8 (1.9)
6	5.3 (0.21)	23 (16)	Y	660 (148)	198 (45)	8.0 (3.1)	5.3 (2.1)
8	6.0 (0.24)	32 (21)	JG	660 (148)	198 (45)	8.9 (3.5)	6.0 (2.3)
Dual Layer							
12 (9/3)	6.3 (0.25)	32 (22)	Y	660 (148)	198 (45)	9.5 (3.7)	6.3 (2.5)
18 (12/6)	7.4 (0.29)	46 (31)	Y	1320 (297)	396 (89)	11.0 (4.3)	7.4 (2.9)
24 (15/9)	8.0 (0.31)	55 (37)	Y	1320 (297)	396 (89)	12.0 (4.6)	8.0 (3.1)

Central Member Types: Y = Yarn, JG = Jacketed GRP

Fiber arrangement in dual-layer designs is shown in parentheses. Example: (9/3) = 9 outside fibers around 3 inner fibers

Transmission Performance

Fiber Type	62.5/125 µm (850/1300 nm)	62.5/125 µm (850/1300 nm)	62.5/125 µm (850/1300 nm)	50/125 µm (850/1300 nm)	50/125 µm (850/1300 nm)	50/125 µm (850/1300 nm)	Single-mode (1310/1550 nm)
Performance Option Code	10	30	50	31	40	80	31
Maximum Attenuation (dB/km)	3.5/1.0	3.5/1.0	3.5/1.0	3.5/1.5	3.5/1.5	3.5/1.5	1.0/0.75
Typical Attenuation (dB/km)	3.0/1.0	3.0/1.0	3.0/1.0	3.0/1.0	3.0/1.0	3.0/1.0	0.5/0.4
Minimum LED Bandwidth (MHz·km)	160/500	200/500	200/500	500/500	700/500	1500/500	- / -
Minimum Effective Modal Bandwidth (MHz·km)	- / -	220/ -*	385/ -*	510/ -*	850/ -**	2000/ -**	- / -
Serial Gigabit Ethernet Distance (m)	220/550	300/550	300/1000	600/600	750/600	1000/600	5000/ -
Serial 10 Gigabit Ethernet Distance (m)	26/ -	33/ -	33/ -	82/ -	150/ -	300/ -	10000/40000

*EMB when deployed with 850 nm, 1 Gb/s VCSELs, as predicted by RML Bandwidth using FOTP-204.

**EMB when deployed with 850 nm, 10 Gb/s VCSELs, as practical by DMD method using FOTP-220.