PEATSA

Lauro Aguirre No. 32-203 . Col. Agricultura . México, D.F. 11360
www.peatsa.com Tels. 5342-1586 . 5341-8757
contacto@peatsa.com
Messenger: redes_peatsa@hotmail.com

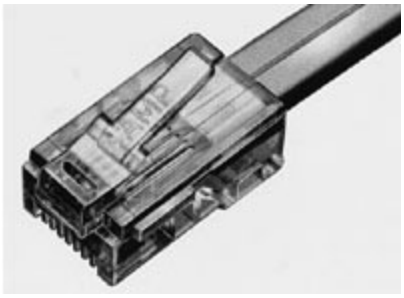

5-554720-3

RJ-45 Modular Plugs, 8-Position, Unkeyed, for Unshielded Flat Oval Cable with Solid 26-24AWG Conductors

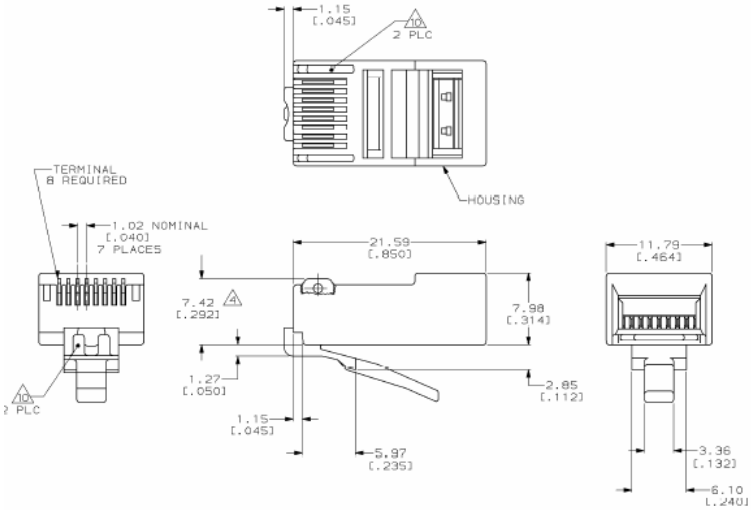

K 085:6/3,EC 0502-0843-97 20MAY98 DS

1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: HOUSING-POLYCARBONATE,CLEAR. TERMINAL-0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27µm[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA. GOLD FLASH OVER THE REMAINDER, OVER 2.54µm[.000100] THICK NICKEL UNDERPLATE.
3. PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.89-0.99[.035-.039] AND A MAXIMUM OVAL CABLE JACKET OF 2.54 X 8.89[.100 X .350].
4. TERMINATED DIMENSION 6.15[.242] MAXIMUM.
6. PACKAGED 10,000 ASSEMBLIES PER CARTON.
7. PACKAGED 500 ASSEMBLIES PER CARTON.
8. PACKAGED 100 ASSEMBLIES PER BOX, 10 BOXES PER CARTON.
9. PACKAGED 25 ASSEMBLIES PER POLYBAG, 40 POLYBAGS PER CARTON.
10. REELED PRODUCT ON STRIP DOES NOT HAVE VOID CORING ILLUSTRATED ON THIS DRAWING.

1 2 3 4 5 6 7 8 9	5-554720-4
1 2 3 4 5 6 7 8 9	5-554720-3
1 2 3 4 5 6 7 8 9	5-554720-2
1 2 3 4 5 6 7 8 9	5-554720-1
REELED 1 2 3 4 5 6 7 8 9 10	554720-1
PACKAGED	PART NO

DIMENSIONS IN mm [INCHES] UNLESS SPECIFIED TOLERANCES ON : 2 PLC DEC ± 3 PLC DEC ± ANGLES ± 1	DR 8-26-93 S.MAYBERRY CHK 9-15-93 C.WHITT APPD 9-20-93 J.TONEY APPD 9-20-93 M.MCGRATH	AMP Incorporated Harrisburg, PA 17105-3608 NAME MODULAR PLUG ASSEMBLY, 8 POSITION, SOLID WIRE
MATERIAL 2 FINISH 2	PRODUCT SPEC 108-1163 APPLICATION SPEC 114-6016 WEIGHT	SIZE C CAGE CODE 00779 DRAWING NO C-554720 SCALE 4:1 SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT PER AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION