



PEATSA

Lauro Aguirre No.32-203 . Col. Agricultura. México, D.F. 11360
 Tels: 5342-1586 . 5341-8757
 contacto@peatsa.com
 www.peatsa.com
 Messenger: redes_peatsa@hotmail.com



1100 CommScope Place SE
 PO Box 1729
 Hickory, NC 28603-1729

(800) 982-1708
 (828) 324-2200

Fax: (828) 328-3400
 Intl Fax: (828) 323-4989


www.commscope.com



Data Pipe™
Outdoor UV Res Cable
 ANSI/TIA/EIA 568 Category 5e
 ISO/IEC 11801
 NEMA WC 63
 Part Number: 5EF4
 4 Twisted Pair Flooded Cable

1 of 2

4 Twisted Pair Flooded Cable

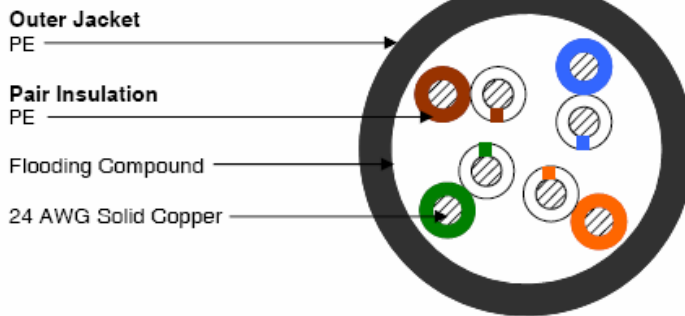

Pair Identification

Pair 1	Blue/White w/Co-Extruded Blue Stripe on White Single
Pair 2	Orange/White w/Co-Extruded Orange Stripe on White Single
Pair 3	Green/White w/Co-Extruded Green Stripe on White Single
Pair 4	Brown/White w/Co-Extruded Brown Stripe on White Single

Mechanical Specification

Non-Plenum

Nominal Jacket OD	0.240"
Nominal Jacket Thickness	0.030"
Jacket Minimum Spot Thickness	0.021"
Installation Temperature 0°C to 60°C	
Operation Temperature -40°C to 70°C	

Available Packaging: Reel in a Box or Reel
Available Colors: Black



Drawings not to Scale
 Specifications subject to change
 Revision: 08/21/07



PEATSA

Lauro Aguirre No.32-203 . Col. Agricultura. México, D.F. 11360
 Tels: 5342-1586 . 5341-8757
 contacto@peatsa.com
 www.peatsa.com
 Messenger: redes_peatsa@hotmail.com



1100 CommScope Place SE
 PO Box 1729
 Hickory, NC 28603-1729
 (800) 982-1708
 (828) 324-2200
 (828) 328-3400
 www.commscope.com

Fax:
 Intl Fax:



Data Pipe™
Outdoor UV Res Cable
ANSI/TIA/EIA 568 Category 5e
ISO/IEC 11801
NEMA WC 63
Part Number: 5EF4
4 Twisted Pair Flooded Cable

2 of 2

Electrical Performance

Frequency MHz	Attenuation (dB/100m) Max	Pair to Pair		Return Loss (dB) Min	ACR (dB) Min	Power Sum		
		NEXT (dB) Min	ELFEXT (dB/100m) Min			NEXT (dB) Min	ELFEXT (dB/100m) Min	ACR (dB) Min
.772	1.8	67	66	NA	65	64	63	62
1.0	2.0	65	64	20.0	63	62	61	60
4.0	4.0	56	52	23.0	52	53	49	49
8.0	5.8	52	46	24.5	45	48	43	43
10.0	6.5	50	44	25.0	44	47	41	41
16.0	8.2	47	40	25.0	39	44	37	36
20.0	9.2	46	38	25.0	37	42	35	34
25.0	10.4	44	36	24.3	34	41	33	31
31.25	11.7	43	34	23.6	31	40	31	28
62.5	17.0	38	28	21.5	21	35	25	18
100.0	22.0	35	24	20.1	13	32	21	10
155.0	28.1	32	20	18.8	4	29	17	1
200.0	32.4	31	18	18.0	NA	28	15	NA

(All tests include swept frequency measurements)

NEXT, and Power Sum values are derived from functions and truncated to the nearest whole dB

(All tests include swept frequency measurements)

Input Impedance (Zin)	100 ohms ± 15 ohms	1-100 MHz
Capacitance/Unbalance	5.6 nF/100m Nominal / 330 pF/100m Max @ 1kHz	
DC Resistance/Unbalance	9.38 ohms/100m Max/ 5% Max	
Dielectric Breakdown	2500 Volts DC Conductor to Conductor	
Propagation Delay Skew	15nSec/100m Max @ 10MHz	
Nominal Velocity of Propagation	61.7%	

Cables are specified with a 6% allowance on propagation delay to the TIA/EIA 568.B.2 specification, due to water proofing agents.



Drawings not to Scale
 Specifications subject to change
 Revision: 08/21/07