


Product Specifications



1091B SL 4/23 W1000


Material ID: 760107078

GigaSPEED® X10D 1091B ETL Verified Category 6A U/UTP Cable, slate jacket, 4 pair count, 1000 ft (305 m) length, WE TOTE® box

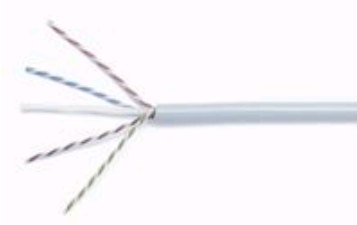

CHARACTERISTICS

Cross Section Drawing

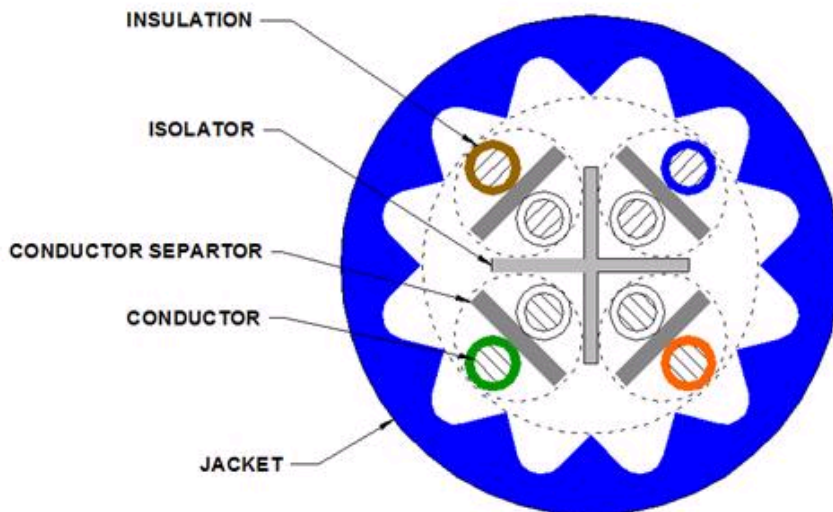

Construction Materials

Conductor Material	Bare copper
Insulation Material	Polyolefin
Jacket Material	PVC
Separator Material	Polyolefin
Separator 2 Material	Polyolefin

SYSTIMAX®
SOLUTIONS
www.commscope.com

©2010 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope.
All specifications are subject to change. See www.commscope.com for the most current information.

page 1 of 3
4/13/2010

Product Specifications

1091B SL 4/23 W1000 - Material ID: 760107078



Dimensions

Cable Length, special	Random length
Cable Weight	37.30 lb/kft
Diameter Over Jacket	7.239 mm 0.285 in
Jacket Thickness	1.295 mm 0.051 in

Electrical Specifications

ANSI/TIA Category	6A
dc Resistance Unbalance, maximum	4 %
dc Resistance, maximum	8.00 ohms/100 m
Mutual Capacitance	6.0 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	65 %
Operating Frequency, maximum	550 MHz
Transmission Standards	ANSI/TIA-568-C.2
Safety Voltage Rating	300 V

Environmental Specifications

Environmental Space	Non-plenum
Flame Test Method	CMG CMR
Installation Temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
UL Temperature Rating	75 °C 167 °F

General Specifications

Brand	GigaSPEED® X10D SYSTIMAX®
Cable Component Type	Horizontal
Cable Type	U/UTP (unshielded)
Pairs, quantity	4
Jacket Color	Slate
Conductor Gauge, singles	23 AWG
Conductor Type, singles	Solid
Conductors, quantity	8
Packaging Type	WE TOTE® box
Product Number	1091B
Separator Type	Isolator

Mechanical Specifications

Pulling Tension, maximum	11 kg 25 lb
--------------------------	---------------

Regulatory Compliance/Certifications

Product Specifications

1091B SL 4/23 W1000 - Material ID: 760107078



Agency

RoHS 2002/95/EC
ISO 9001:2008

Classification

Compliant
Compliant

