




# PEATSA

Martín Mendalde No. 821-1 . Col. Del Valle. México, D.F. 03100  
[www.peatsa.com](http://www.peatsa.com) Tels. 5559-7556 . 5559-4790

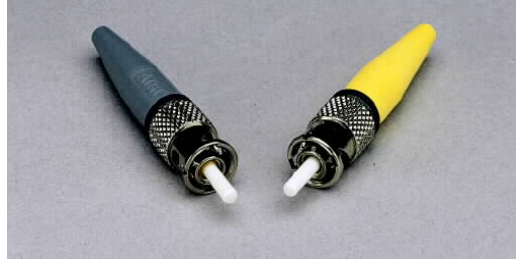

**700004583**

## STII Connectors

The STII Connector Plug is a keyed ceramic fiber-optic connector plug that uses a bayonet-type "ramped-latching" mounting arrangement. The ferrule is made of zirconium which provides for easy, accurate field polishing. STII Connectors will accept 125 micron outside diameter multimode fiber.

The design of the STII provides high optical performance and easy mounting in a rugged, compact connector plug.

The STII can mount on either 0.9 mm buffered fiber, 2.4 mm, or 3.0 mm cordage (or equivalent). The STII is available in both singlemode and multimode.

### Tech. Info & Standards:

Length: 5.64 cm (2.2 in)

Temperature Stability (-40 to 85°C): < 0.1 dB increase

Loss Repeat (500 Reconnectors): <0.2 dB

Min. Axial Load - Cable: 15.9 kg (35 lb)

Multimode Average Loss: 0.3 dB

Singlemode Average Loss: 0.2 dB

<b>Fabricante</b>	SYSTIMAX SOLUTIONS
<b>Part Number del fabricante</b>	P2020C-C-125
<b>Código de cliente</b>	700004583
<b>Descripción</b>	CONECTORES MARCA: LUCENT-NET MODELO: P2020C-C-125

<b>Características</b>	
<b>Size:</b>	MULTI MODE
<b>Type:</b>	ST